

DS-2CE55C2P(N)-IRP


720 TVL PICADIS Indoor IR Dome Camera



Key features

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- True Day/Night
- 3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range

Dimensions

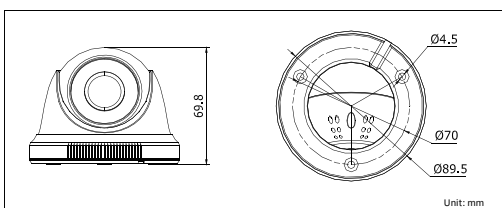

Accessories



DS-1229ZJ-1
(Wall Mount)



DS-1239ZJ-1
(Wall Mount)

DS-2CE55C2P(N)-IRP	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.3 Lux @ (F2.3, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	3.6 mm @ F2.3 (6 mm optional) Angle of view: 73.1° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°; Tilt: 0 - 75°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
IR Range	Approx. 10 to 20 meters
Dimensions	Φ 89.5 × 69.8 mm (Φ 3.52" × 2.75")
Weight	200 g (0.44 lbs)

Available models

PAL: DS-2CE55C2P-IRP
NTSC: DS-2CE55C2N-IRP